



Everlast Metals

Fluoropon® Color Guide



Colors marked with an dot (*) are Premium Colors.

PLEASE NOTE: The colors listed on this color chart are as close to the actual painted metal as possible. Actual color swatches are available upon request.

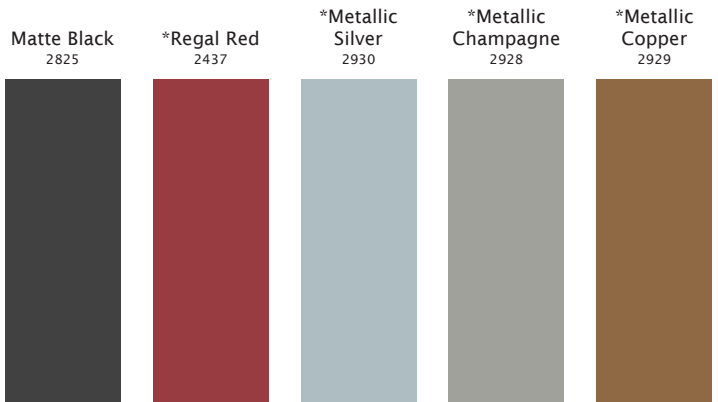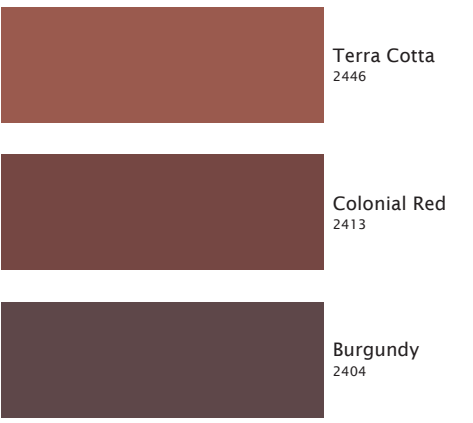

Everlast Metals

800.418.5057

EVERLASTMETALS.COM

FLUROPON® PAINT SYSTEM	STEEL	ALUMINUM		TECHNICAL DATA							
		24 GA.	0.032	0.040	LEED®	INITIAL TSR	INITIAL TE	INITIAL SRI	3 YEAR TSR	3 YEAR TE	3 YEAR SRI
STANDARD FINISH - 35 YEAR WARRANTY											
Almond	•	•		•	0.56	0.83	65	0.65	0.83	77	
Bone White	•	•	•	•	0.67	0.87	81	0.64	0.87	77	
Burgundy	•	•			0.26	0.87	25	0.26	0.87	25	
Burnished Slate	•	•	•	•	0.31	0.87	32	0.32	0.87	33	
Charcoal	•	•	•		0.27	0.87	27	0.28	0.87	27	
Cityscape	•	•	•	•	0.38	0.87	42	0.39	0.87	30	
Colonial Red	•	•	•	•	0.29	0.83	30	0.29	0.88	30	
Dark Bronze	•	•		•	0.29	0.88	30	0.30	0.88	30	
Dark Gray	•	•	•	•	0.34	0.88	36	0.34	0.88	36	
Forest Green	•	•	•	•	0.32	0.88	33	0.32	0.87	33	
Gallery Blue	•	•	•	•	0.30	0.87	31	0.30	0.87	31	
Hartford Green	•	•	•	•	0.29	0.87	30	0.29	0.88	30	
Mansard Brown	•	•	•	•	0.28	0.88	29	0.29	0.89	30	
Matte Black	•	•	•	•	0.26	0.89	25	0.26	0.87	25	
Patina Green	•	•	•	•	0.28	0.87	29	0.28	0.89	29	
Sandstone	•	•	•	•	0.40	0.89	44	0.40	0.87	44	
Sierra Tan	•	•	•	•	0.54	0.87	63	0.53	0.87	62	
Slate Blue	•			•	0.52	0.87	60	0.51	0.87	59	
Slate Gray	•	•	•	•	0.34	0.88	36	0.34	0.88	36	
Stone White	•			•	0.43	0.87	48	0.43	0.87	48	
Terra Cotta	•			•	0.62	0.88	74	0.59	0.88	70	
Galvanized G90 - Acrylic Coated	•										
Galvalume® AZ55 - Acrylic Coated	•										
Mill Finish		•	•								
PREMIUM FINISH - 35 YEAR WARRANTY											
Regal Red	•	•		•	0.49	0.88	56	0.49	0.88	56	
Metallic Champagne	•			•	0.41	0.87	46	0.38	0.91	43	
Metallic Copper	•	•		•	0.37	0.87	41	0.43	0.90	50	
Metallic Silver	•	•		•	0.54	0.87	64	0.46	0.91	53	

POLYESTER PAINT SYSTEM	STEEL	ALUMINUM	
STANDARD FINISH - 35 YEAR WARRANTY	24 GA.	0.032	0.040
Bronze/White		•	
Medium Bronze/Bronze		•	
Black/White		•	
White/White		•	

- Oil canning is not a cause for rejection.
- Protective film must be removed immediately after installation.
- For a true color representation, please call or write for actual metal sample(s).
- Contact your local sales representative for specific stocking information and special requests.