


### Description:

The Everlast Metals LYNX panel creates an attractive board and batten look, which is a popular choice. The crisp, clean appearance, along with the variety of color options available, make it the perfect roof for residential buildings. A full line of trims and accessories are available to complete your building project. The panels, which interlock to create the attractive look, also provide for the weathertight seal. They have a deep antisiphon groove, which protects against leakage.

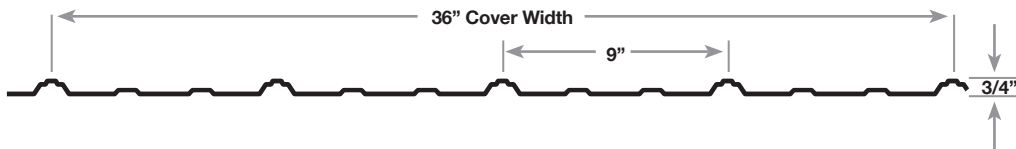

### General Use & Method of Application:

- Install in accordance with industry-recognized sheet metal practices.
- Cut, form, and fasten using conventional hand or power tools.
- For best results cutting tool edges should be kept sharp, clean, properly dressed, and closely aligned.

### Storage:

Everlast Metals metal panels should be stored in a well-ventilated, dry place where no moisture can contact them. Moisture (from rain, snow, condensation, etc.) trapped between layers of material may cause water stains or white rust, which can affect the service life of the material and will detract from its appearance. If outdoor storage cannot be avoided, protect the panels with a ventilated canvas or waterproof paper cover. Do not use plastic, which can cause condensation. Keep the material off the ground in an inclined position with an insulator such as wood.

### Precautions:

- Product should not be used in areas of high abrasion or where it is subject to mechanical damage.
- Product is pre-finished material; care must be exercised during fabrication and erection to avoid surface damage.
- Attention should be paid to good house-keeping practices.
- Avoid dragging sheets over surfaces which may scratch or mar the finish.
- For general sheet metal use in building applications.
- Do not cut with power saws or abrasive blades.

### Manufacturing Locations:

Lebanon, PA • Howe, IN • Bridgton, ME • Orwell, OH

### Product Size:

Panel Widths:	36"
Seam Height:	3/4"
Minimum Panel Length:	36"
Maximum Panel Length:	40'

### Product Data:

Minimum Slope:	3:12
Tapered Panels:	No
Radiused Panels:	No
Stiffening Ribs:	Yes
Striations:	No
Standard Panel Surface:	Smooth

### Technical Information:

Uplift Test:	UL 560
Impact Resistance:	UL 2218 Class 4
Fire Resistance:	UL 790 Class A

Note: Testing is not applicable for all combinations of substrates, materials, and dimensions. All construction assemblies must be installed in accordance with the testing assembly. Please refer to the Product Specifications on the Everlast Metals website for tested assemblies and code listings.

### Material and Thickness:

AZM® Steel  
28 Gauge

### Metal Specification:

Base Metal: AZM® 110 Steel  
(28-gauge (.0160) Structural Steel Grade 80 produced in conformance with ASTM792 COATING, 47% to 57% aluminum, 1% to 3% magnesium, 1% to 2% silicon with the remainder zinc)

### Available Finishes:

COLORBOND®

Note: For standard color selection, consult the current color charts. Not all materials and thicknesses are available from all locations.

Please contact Everlast Metals (800) 418-5057 for further information.

This sheet is meant to highlight Everlast Metals products and specifications and is subject to change without notice. Everlast Metals takes responsibility for providing quality materials which meet published Everlast Metals product specifications. Neither Everlast Metals nor its representatives practice architecture. Everlast Metals offers no opinion on and expressly disclaims any responsibility for the soundness of any structure. Everlast Metals accepts no liability for structural failure of resultant damages. Consult a competent structural engineer prior to installation if the structural soundness or structural ability to properly support a planned installation is in question. No Everlast Metals representative is authorized to vary this disclaimer.